

Stanley Rush Series 4500 Security Revolving Door



PROVIDING RAPID, SIMULTANEOUS TWO-WAY PASSAGE TO AUTHORIZED PERSONNEL


- All type card reader capacity
- Allows for simultaneous two-way traffic and continuous operation
- Automatic hands free operation and Mat sensing for reliable operation, with anti-tailgating feature
- PLC based programmable controller integrates with all access systems
- Load sensing on door wings to prevent unwanted intrusion
- Finished floor mount application for retrofit to existing facilities. Door design meets ANSI/BHMA Standard 156.27



STANLEY Rush Products Group

65 Riviera Drive
Markham, ON, L3R 5J6
(T) 905-944-8005
(F) 905-944-8006
StanleyRush@sbdinc.com
www.stanleyrush.com

Stanley Rush Series 4500 Security Revolving Door

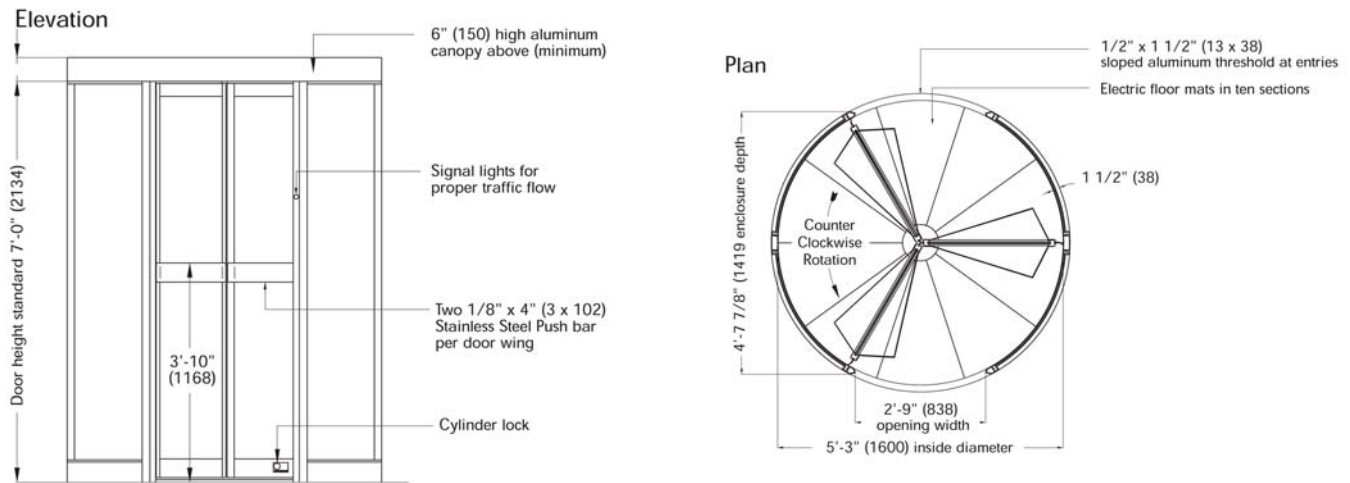

Series 4500 Features and Specifications:

Description	Standard Configuration	Options
Diameters	5'3", 6', 7' ID (1600, 1829, 2134 mm)	custom diameters available
Heights	7' door opening (2134 mm)	consult factory
Canopy	6" minimum, round, 1 piece	optional heights
Wings	3 or 4	+ or x starting point'
Stiles	narrow	consult factory
Locks	two	
Wing glass	1/4" tempered (6 mm)	consult factory
Drum wall	curved enclosure	consult factory for glass thickness
Access control	one or two way security	anti-piggybacking
Control	PLC pre - programmed	
Lights	none	3-1/4" LED lights optional
Finish	anodized aluminum, clear, bronze	Rushclad cladding, painted
Roof	included	to match finish
Ceiling	solid two piece, fixed	ceiling hatch
Design/Testing	ANSI 156.27, see specifications	
Security floor mats	1/2" (12 mm) rubber security mats, anti-tailgating	overhead sensors, stereovision
Push bars	1" (25 mm) diameter round	custom options
Card reader bracket	optional	optional
Power	120V	



STANLEY Rush Products Group

65 Riviera Drive
Markham, ON, L3R 5J6
(T) 905-944-8005
(F) 905-944-8006

StanleyRush-sales@sbdinc.com
www.stanleyrush.com