

## Stanley Rush Series 2500 Revolving Door



ELEGANT, SLEEK, AND POLISHED DESIGN COMPLEMENTING  
MOST BUILDING INTERIORS

- All glass flush glazed door and invisible enclosure base sections
- Concealed collapsing mechanism and speed control
- Conforms to ASTM E283 for air tightness
- Available in 3-Wing or 4-Wing design
- Standard diameters 6'6" to 9'0"
- Optional Rushclad - adhesive applied wrap around design cladding for high quality , long lasting finish



### STANLEY Rush Products Group

65 Riviera Drive  
Markham, ON, L3R 5J6


(T) 905-944-8005

(F) 905-944-8006

StanleyRush@sbdinc.com

[www.stanleyrush.com](http://www.stanleyrush.com)

# Stanley Rush Series 2500 Revolving Door


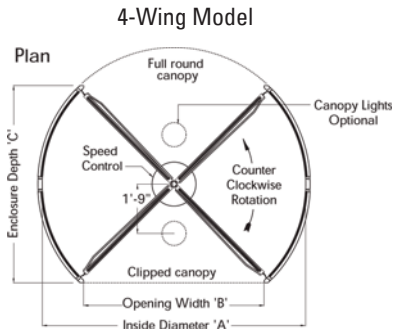


Standard 4-Wing Dimensions

DOOR DIAMETER – A	OPENING WIDTH – B	ENCLOSURE DEPTH - C
*6' 6" (1981)	4' 5 1/4" (1353)	4' 10 5/8" (1489)
*7' 0" (2134)	4' 9 1/2" (1461)	5' 2 7/8" (1597)
*7' 6" (2286)	5' 1 3/4" (1568)	5' 7 1/8" (1705)
*8' 0" (2438)	5' 6" (1676)	5' 11 3/8" (1813)

Standard 3-Wing Dimensions

DOOR DIAMETER – A	OPENING WIDTH – B	ENCLOSURE DEPTH - C
*6' 6" (1981)	3' 0 3/8" (924)	5' 11 1/4" (1810)
*7' 0" (2134)	3' 3 3/8" (1000)	6' 4 1/4" (1937)
*7' 6" (2286)	3' 6 3/8" (1076)	6' 9 7/16" (2069)
*8' 0" (2438)	3' 9 3/8" (1153)	7' 2 5/8" (2200)

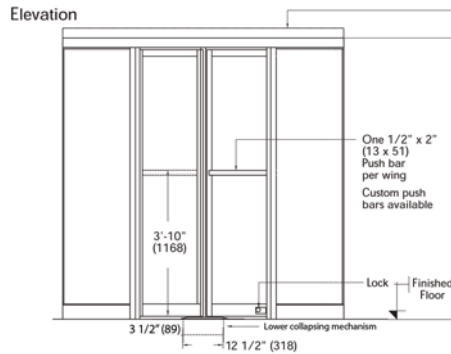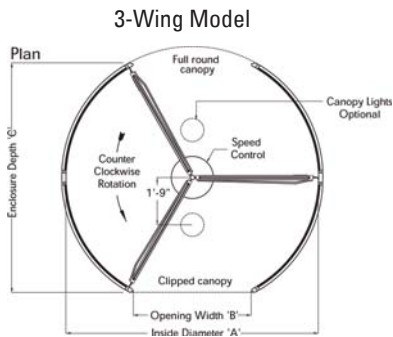

Standard 3" high canopy  
Optional 8" high canopy  
is required if using over-head  
speed controllers

Custom Dimensions are available in almost any size.

\*Denotes standard size doors in 7' 0" (2134) height. All other sizes and heights are custom fabricated and finished to suit specific job requirements.

IMPORTANT NOTICE: 3-WING models have a smaller opening width and therefore we recommend that 2 units be considered for in/out traffic flow.

## Series 2500 Features and Specifications:

Description	Standard Configuration	Options
Diameters	6' to 9' ( 1829 to 2743 mm)	consult factory for sizes
Heights	7' standard (2134 mm)	consult factory for sizes
Canopy	3 inch minimum	consult factory
wings	3 or 4 wing manual	hydraulic power assist where applicable
stiles	narrow stile	medium or wide stile in clad finishes
locks	two mortised in bottom rails of wings	
wing glass	1/2" (12 mm)	consult factory
drum wall	5/16" (8mm)	
lights	none	3-1/4" diameter LED optional
finish	anodized aluminum, clear, bronze	Rushclad cladding, paint
Roof	full circular aluminum	to match door finish
ceiling	solid one or two piece to match finish	ceiling hatch
design/testing	ANSI 156.27, see specifications	
push bars	1" (25 mm) diameter round	consult factory



## STANLEY Rush Products Group

65 Riviera Drive  
Markham, ON, L3R 5J6  
(T) 905-944-8005  
(F) 905-944-8006

StanleyRush-sales@sbdinc.com  
www.stanleyrush.com



*Brisbin Brooke Beynan, Architect*

#2500 Series Revolving Door  
#3060 Series Pivot Door

Patina Copper Columns, Panels,  
Curtainwall Caps and Spandrels  
for complete building envelope.  
Stainless steel mirror finish on  
doors

